Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 222914 (205205-2)

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
© COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST
BD	48

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	H	REVISED PER EC 0U1D-0260-00	12 SEP 01	JR	JG

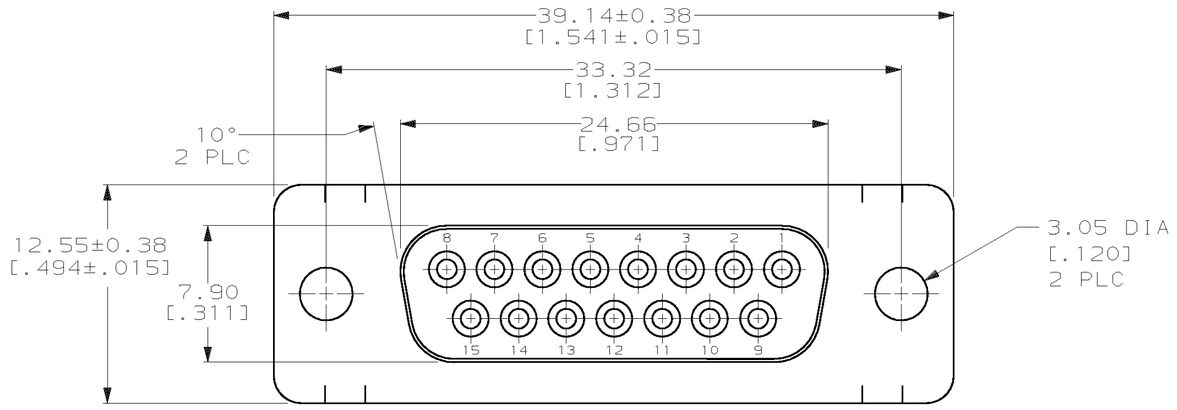

1. CONNECTOR ACCEPTS SIZE 20 DF SOCKET CONTACTS, RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
2. CONNECTOR COMPLIES WITH 108-40005 WHERE APPLICABLE.
3. NYLON, FLAME RETARDANT, 94V-0 RATED, GLASS FILLED, BLACK.
4. STEEL PER ASTM A109.
5. ZINC PLATED PER ASTM B633; TYPE II; CLASS SC1; YELLOW CHROMATE.
6. TIN PLATED PER MIL-T-10727 OVER COPPER PER MIL-C-14550.

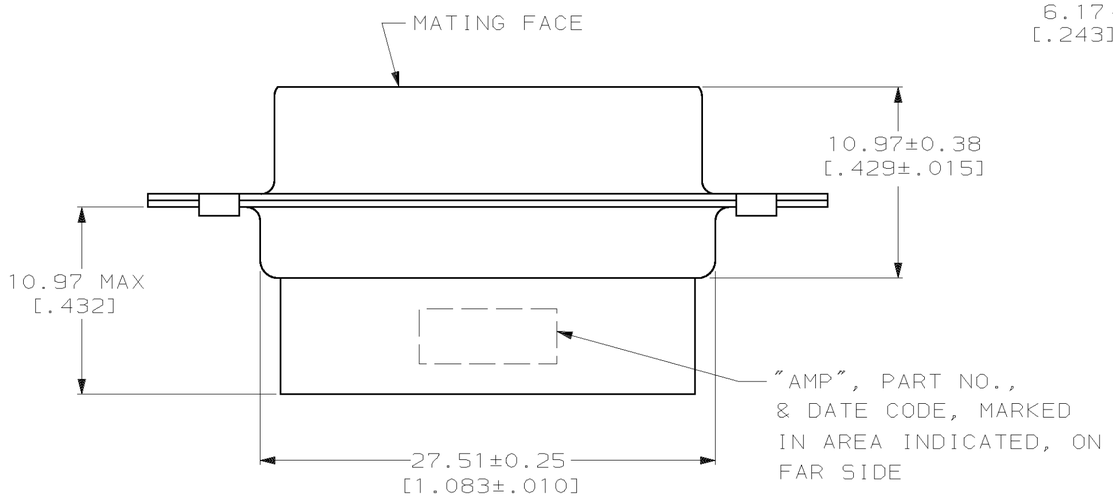

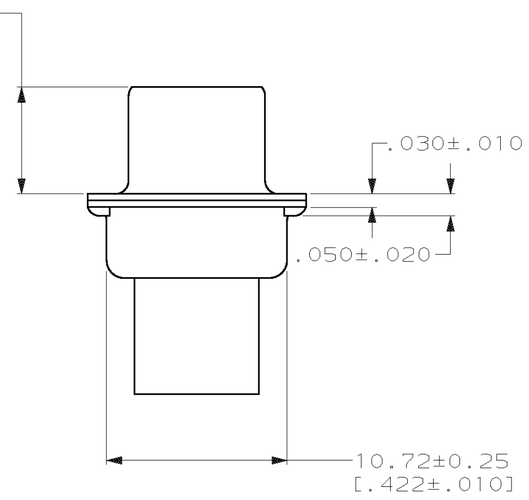

SUPERSEDED BY 205205-1	SMALL PACK	5	205205-5
	STANDARD	6	205205-2
	STANDARD	5	205205-1
	PACKAGING TYPE	SHELL FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±0.13 [.005]
3 PLC ±-
4 PLC ±-
ANGLES ±2°

MATERIAL MOLDED PARTS: 3
SHELLS: 4

FINISH SHELLS: SEE TABLE

DWN	S. WELDON	7-19-85
CHK	J. GERACE	7-29-85
APVD	V. KUMAR	7-31-85
PRODUCT SPEC	–	
APPLICATION SPEC	–	
WEIGHT	–	

AMP Incorporated
Harrisburg, PA 17105-3608

NAME: RCPT CONNECTOR, SIZE 2, 15 POSN, AMPLIMITE™, HDP

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C- 205205	–

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV H

205205